

SLM770A

LTE Cat.4 LCC

SLM770A

— LTE Cat.4

150Mbps

50Mbps

3G 2G


SLM770A

ASR1803

SLM750

MeiG Smart SLM770A

LTE Cat.4 LCC

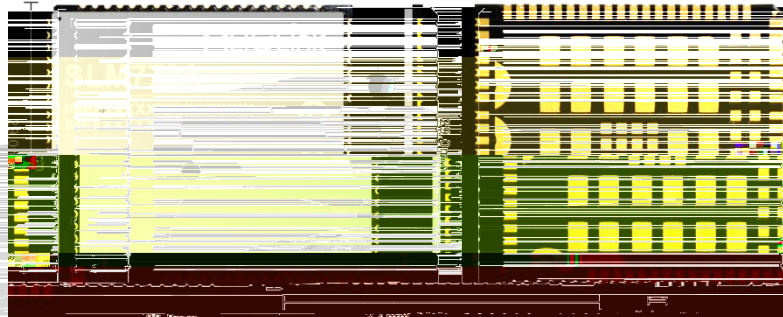

LCC+LGA (144pin)

32.0 × 29.0 × 2.4mm

<6g



LTE-FDD (Cat.4): Max 150Mbps(DL)/50Mbps(UL)

LTE-TDD (Cat.4): Max 130Mbps(DL)/35Mbps(UL)

WCDMA: Max 384kbps(DL)/384kbps(UL)

EDGE: Max 236.8kbps(DL)/236.8kbps(UL)

GPRS: Max 85.6kbps(DL)/85.6kbps(UL)



10uA@

<5mA@

<30mA@

3.3V~4.2V

3.8V



&



Window , Linux 2.6 , Android 4.0

工 — 工

USB/FOTA



PPP/ECM/TCP/UDP/DTLS/HTTP(S)/FTP(S)/MQTT(S)



USB2.0 1

SIM □(1.8 / 3.0V)

PCM

UART*2

□ / ()/GNSS()



-40 ° C~+85 ° C -40 ~-30 +75 ~85

-45 ° C ~ +90 ° C

5%~95%



GSM850/900 33±2dBm, GSM1800/1900 30±2dBm,
WCDMA/HSPA 23+1/-3dBm, LTE-TDD 23±2.7dBm, LTE-
FDD 23±2.7dBm



CCC/CTA/SRRC/CE/RCM



SLM770A

GNSS

SLM770A-CA

LTE-FDD:B1/B3/B5/B8
LTE-TDD:B34/B38/B39/B40/B41
WCDMA:B1/B8
GSM:900/1800

SLM770A-CB

LTE-FDD:B1/B3/B5/B8
LTE-TDD:B34/B38/B39/B40/B41
WCDMA:B1/B8
GSM:900/1800

支

SLM770A-CC

LTE-FDD:B1/B3/B5/B8
LTE-TDD:B34/B38/B39/B40/B41
WCDMA:B1/B8
GSM:900/1800

支

支

SLM770A-CE

LTE-FDD:B1/B3/B5/B7/B8/B20/B28
LTE-TDD:B38/B40/B41
WCDMA:B1/B8
GSM:900/1800

SLM770A-EU

LTE-FDD:B1/B3/B7/B8/B20
LTE-TDD:B38
WCDMA:B1/B8
GSM:900/1800

SLM770A-SA

LTE FDD:B1/2/3/4/5/7/8/28/66
LTE TDD:B40
WCDMA:B1/2/4/5/8
GSM:850/900/1800/1900

